




Power Supply

WAA-POW-04CH

Key Features:

- Operational Input Voltage 100V to 240V AC
- High Efficiency
- Built-in charger for batteries
- Zero voltage drop upon transfer to battery backup
- Short Circuit Protection (Output shuts down and restarts automatically)
- Automatic switch over to stand-by battery when AC fails
- Over-Discharge Protection

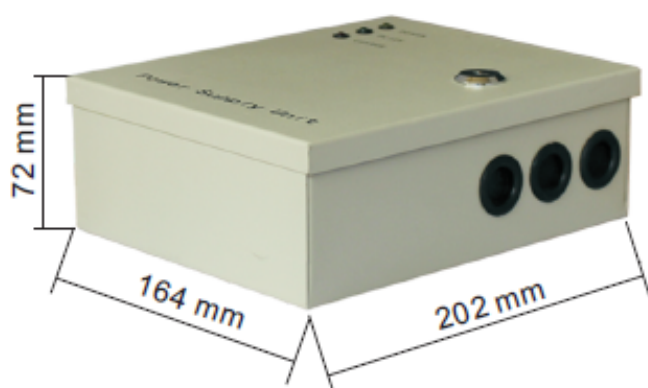

SUPPORT

Input Voltage	100-240VAC
Output Voltage	13.8V DC
Total Output Current	5A 1.25A*4CH
Efficiency	>80%
Work Temperature	-0°C ~ 40°C
Storage Temperature	-25°C ~ 75°C
Humidity	95RH
Rated Input Voltage	220VAC
Input Voltage Range	100-240VAC
Input Current	1.8A
Input Freq Range	50/60Hz
Voltage Regulation	13.8V DC ±5%
Voltage with full load	13.8V DC ±5%
Products Size	202×164×72mm
Fuse Type	1.6A PTC FUSE

**All logos & trade marks represent the registered users only. All rights reserved.*

**All product specifications on this brochure are subject to change without notice.*

CANADA

351 Ferrier St. Unit 5
Markham, Ontario L3R 5Z2
Tel. +1-416-410-6865
Toll Free: 1-866-843-6865

USA

417 Old Falls Blvd.
N. Tonawanda, NY 14120
Tel. +1-716-877-7277
Toll Free: 1-866-843-6865

MIDDLE EAST

PO Box No 126312
Suite 703 Oxford Tower
Business Bay, Dubai, UAE
Tel. + 971-4-2767117

www.watchnetaccess.com
info@watchnetinc.com

